
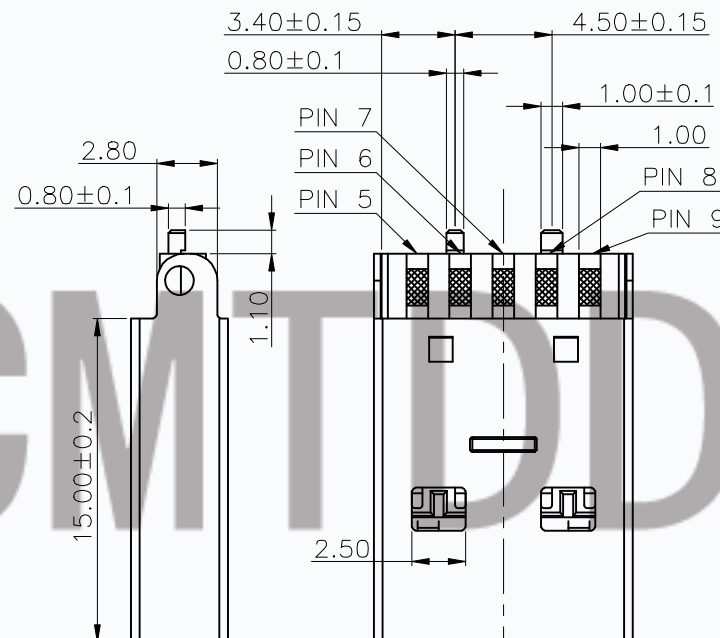
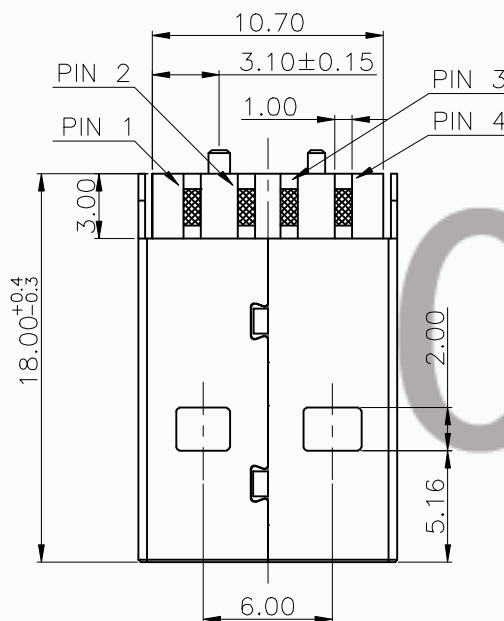


RoHS

REV.	EC#	DESCRIPTION	DATE	DRAWING	CHECKED	APPROVED
A0		NEW RELEASE	09/13'14	JEFF		ERIC

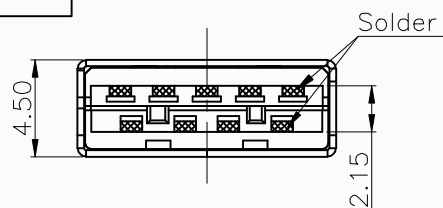

NOTE:

*Electrical Characteristics;

- 1.CONTACT RESISTANCE: 30mΩ MAXIMUM
- 2.CONTACT CURRENT RATING: 1.5A
- 3.DIELECTRIC WITHSTANDING VOLTAGE: 500 V R.M.S.
- 4.INSULATION RESISTANCE 1000 MEGOHMS MIN

*Mechanical Characteristics;

- 1.MATING FORCE: 3.57kg MAX
- 2.UNMATED FORCE: 1.02kg MIN

T10-3M009S- * S* 003 *- * *


W: 白色 B: 黑色
L: 蓝色 R: 红色
G: 绿色

S1 镀金1u" S2 镀金3u"
S3 镀金5u" S4 镀金10u"
S5 镀金15u" S6 镀金30u"

L: LCP B: PBT
6: PA66 9: PA9T

C: 外壳铜壳
S: 外壳不锈钢
P: 外壳铁壳

N: 外壳镀镍
G: 外壳镀金

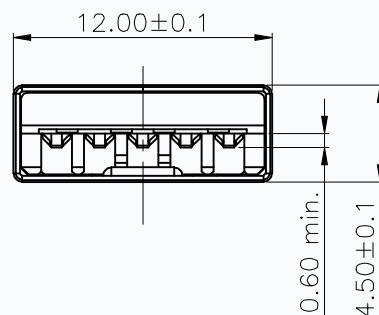

MILLIMETERS	INCH	UNITS	MM	CMTDDZ 东莞市田都科技有限公司 Dongguan TianDu Technology Co. Ltd.			
X ⁺ ± 1'	X ⁺ ± 1'	MAT'L		PART NUMBER:		TITLE:	
.X ± 0.38	.XX ± 0.001	SEE NOTES		SEE PART NO.		USB 3.0 A TYPE 公头 短体自动焊模式(加锁)	
.XX ± 0.25	.XXX ± 0.00625	FINISH		APPD: JEFF		DWG NO.:	
.XXX ± 0.15	.XXXX ± 0.000375	SEE NOTES		CHKD:		T10-3M009S	
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF Dongguan TianDu Technology Co., Ltd. COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF Dongguan TianDu Technology Co., Ltd.				QTY		DR: ERIC	
				SEE NOTES		SCALE	
						1:1	
						SHEET	
						1/1	
						REV.	
						A0	