


1 2 3 4 5 6 7 8

项目 Mapx	设计内容 Modification	日期 Date	修改人 Draw	核准 Approve

A
B
C
D
E
F

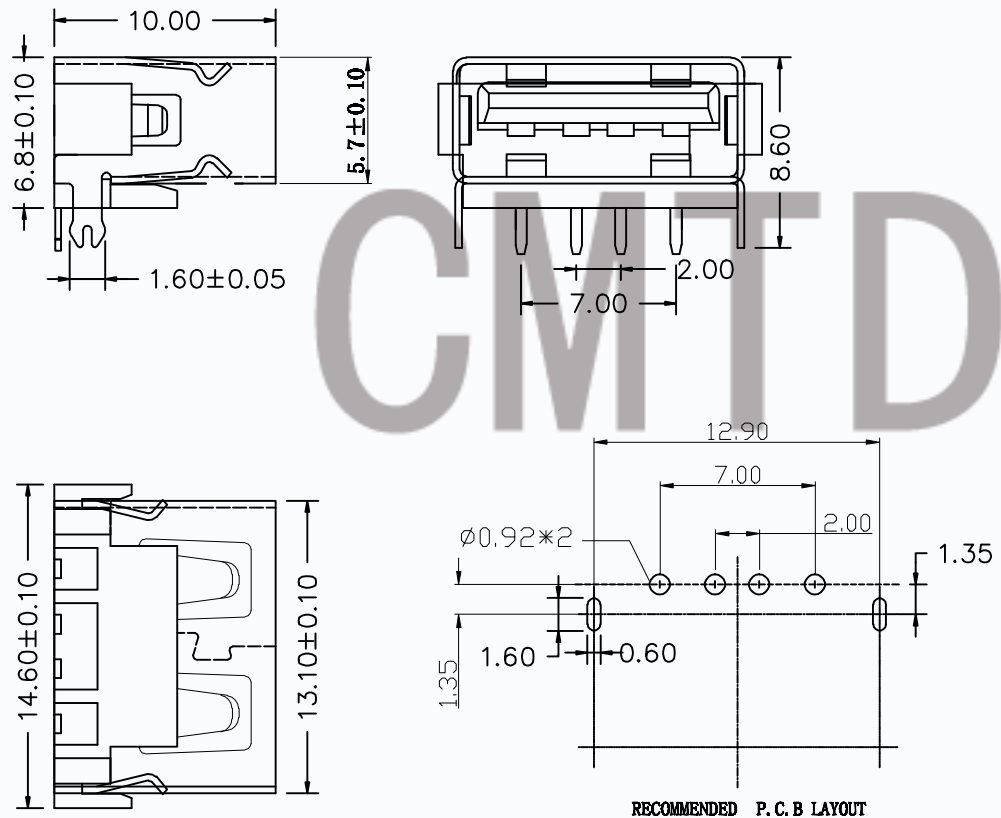

规格说明:Specifications:

电气特性:Electrical:

- 1.额定电流: Current Rating
1.5A/contact terminal
- 2.额定电压: Voltage Rating
30V DC
- 3.接触阻抗: Contact Resistance
30 milliohms MAX
- 4.耐电压: Dielectric Withstanding Voitage:
500 V AC AT Sea Level
- 5.绝缘阻抗: Lnsulation Resistance:
1000MEGA ohms MIN

物理性能:Mechanical:

- 1.插拔力: Cnconnector Mate and Unmate Force
Mate force:3.57kgf(MAX)
Unmate force:1.02kgf(MIN)
- 2.端子保持力: Terminal Retenion
1.0kgf(MIN)

原材料:Material:

- 1.塑胶: Housing:
Hing Temperature Thermaplastics,
- 2.端子: Contact: Copper Alloy C2680
- 3.外壳: Shell: Copper Alloy C2680/SPCC

电镀:Finish:

- 1.端子: Contact: Plated Gold in Mating Area
Tin On Solder Talls
端子四周镀50U”(MIN)锡, 镀金区域镀100-200U”镀金1U”
- 2.外壳: Shell:
铜壳四周镀80U”(MIN)锡

Nickel Plating

成品图 MANUFACTURE DWG		CMTDDZ 东莞市田都科技有限公司 Dongguan TianDu Technology Co. Ltd.									
公差一览表 TOLERANCE UNLESS OTHERWISE		日期 DATE	2016.10.20	单位 UNIT	MM	制图 DRAWING		DWG NO.	T10-2F100-90-6.8-Z-D-H2-01		
.X±0.15	.X±5'	审核 CHECKED		比例 SCALE	1:1	设计 DESIGN	ERIC	品名 NAME	矩体10.0母座		
.XX±0.05	.X±2'	核准 APPROVE		角法 VIEW	⊕			版本 VER	AO	页数 SHEET	PG1
.XXX±0.02	.XX±1'										

1 2 3 4 5 6 7 8