

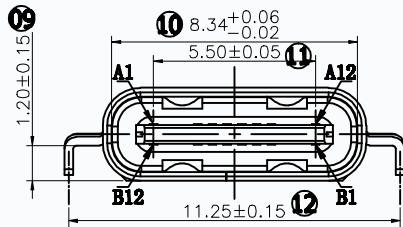
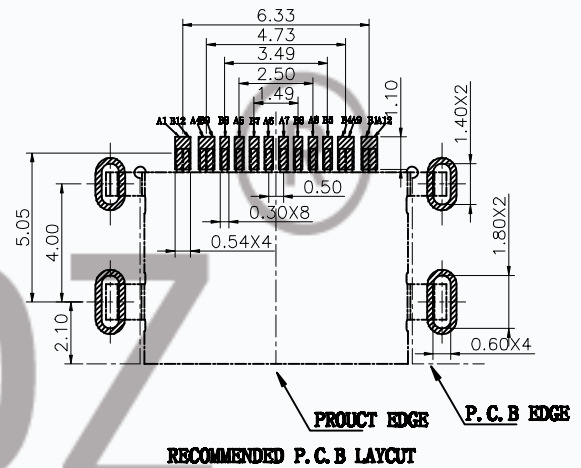
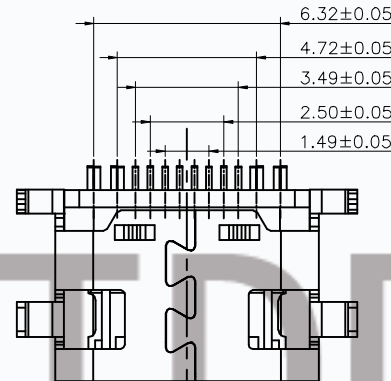
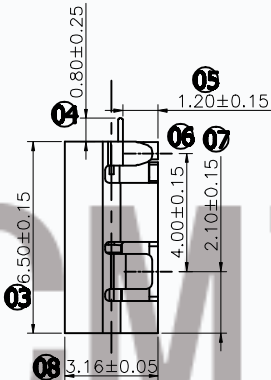


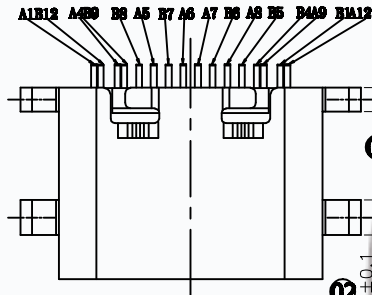


REV	DESCRIPTION	DATE	APPROVED
A0	新板发行	2021.01.13	ERIC



- NOTES:
- MECHANICAL: MATING FORCE: 5-20N .  
UNMATING FORCE: 8-20N .  
DURABILITY: 10000 CYCLES MIN.
  - ELECTRICAL:  
CURRENT: 5.0A MAX  
VOLTAGE: 20V MAX  
WITHSTANDING VOLTAGE: 100V AC  
CONTACT RESISTANCE: 40 mΩ MAX INITIAL;  
50 mΩ MAX AFTER 10000 CYCLES
  - ENVIRONMENTAL:  
OPERATING TEMPERATURE RANGE -30° C ~ +80° C  
4. Salt Spray: 24H

BOM			
序号	名称	用量	品名规格
1	外壳	1	Typec 16PIN 沉板 1.2 外壳 SUS304 Ni 50u" T=0.30mm
2	Molding	1	Typec 16PIN 沉板 1.2 Molding C7025 T=0.15 Au 1u" Ni 80u" LCP+30%G.F黑色 SUS301 T=0.15mm 半成品

A1	GND	B12	GND
A2		B11	
A3		B10	
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	D+	B7	D-
A7	D-	B6	D+
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A10		B3	
A11		B2	
A12	GND	B1	GND

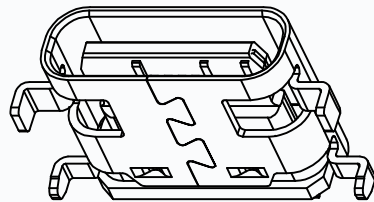

CUSTOMER DRAWING			CMTDDZ 东莞市田都科技有限公司 Dongguan TianDu Technology Co. Ltd.		
UNITS mm	SCALE 1:1	SHEET 1 OF 1	TITLE Type-C 16PIN 沉板1.2 L=6.5mm		
PROJECTION: 		DRAW: ERIC	MATERIAL		FINISH
GENERAL TOLERANCE 0. ±0.25 0.0 ±0.20 0.00 ±0.15 0° ±4° 0.0° ±3°		CHECK:	DWG. NO. T11-16CB06-1.2H-6.5L		PART NO.
		APPD:	SIZE A4		