



版本	变更内容	工程确认	日期

A





专利产品，仿冒必究

B

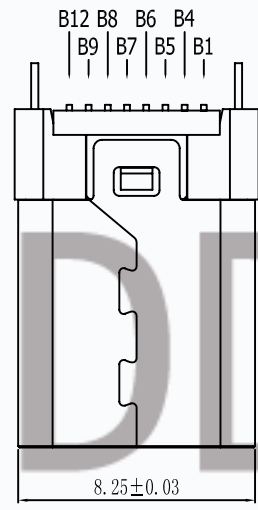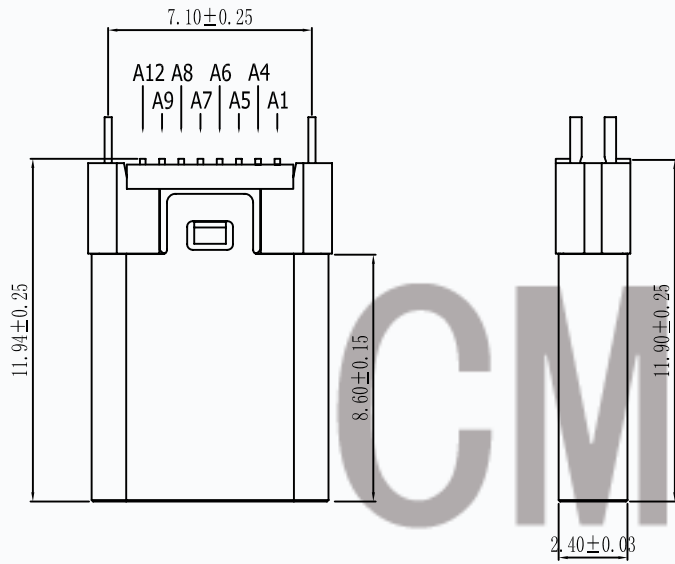

C

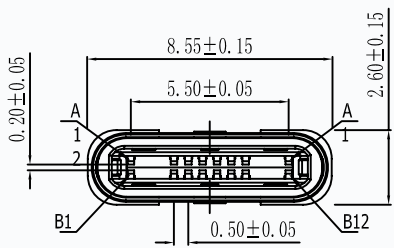

D

USB TYPE C 接线示意图

A4、A9、B9、B4	V
A5	
B5	
A1、A12、B1、B12	G
A6	D+
A7	D-

(R1=56KΩ R3=56KΩ) 5%

E

NOTES:
 1. MECHANICAL:
 MATING FORCE: 5-20N .
 UNMATING FORCE: 8-20N .
 DURABILITY: 10000 CYCLES MIN.
 2. ELECTRICAL:
 CURRENT: 5.0A MAX
 VOLTAGE: 20V MAX
 WITHSTANDING VOLTAGE: 100V AC
 CONTACT RESISTANCE: 40 mΩ MAX INITIAL;
 50 mΩ MAX AFTER 10000 CYCLES
 3. ENVIRONMENTAL
 OPERATING TEMPERATURE RANGE -30°C ~ +80°C

E

④	GND LATCH	1	STAINLESS STEEL	NICKEL PLATED OVERALL, TAB WITH LEAD FREE TIN ALLOY.
③	CONTACT	16	COPPER ALLOY	NICKEL UNDERPLATING OVER ALL, GOLD PLATING AT - CONTACT AREA. LEAD FREE TIN ALLOY AT TERMINATION.
②	SHELL	1	STAINLESS STEEL	CLEAN.
①	HOUSING	2	THERMOPLASTIC UL 94V-0	MOLDED COLOR:BLACK,white
NO.	DESCRIPTION	QTY.	MATERIAL	TREATMENT

一般公差加工参考表

X.	±	X.*	± 2'
.X	±0.25	.X*	± 1'
.XX	±0.15	.XX*	± 0.5'
.XXX	±0.05	.XXX*	± 0.5'

Φ 单位 M M 比例 1:1

公司名称		CMTDDZ 东莞市田都科技有限公司 Dongguan TianDu Technology Co. Ltd.			
设计		品名	Type C 16p 公头 立式 贴片 H=11.94		
审核		图号	T11-3M-008S		
核准		版本	A	页码	1/1

F