

**技术指标:**

- 1. 塑件表面应光洁、无毛边、无明显收缩、缺陷、裂纹等现象。
- 2. 温度范围: -40° C~85° C.
- 3. 额定电压: 125V, AC/DC.
- 4. 接触电阻: ≤0.02Ω.
- 5. 绝缘电阻: ≥100MΩ.
- 6. 额定电流:

通用线规型号: a. AWG28: 2.5A (per pin)  
 b. AWG30: 1.0A (per pin)  
 c. AWG32: 0.8A (per pin)


**7. 产品料号:**  
**T19-125185T-4-\*\*-\*\***

NO OF CKT(产品PIN数)      A      B      LOGO: ID  
 Plating(电镀方式)      R: 镀

1: 端子全亮锡  
 2: 端子全金(G/F OVERALL)

(单位为毫米)

CKT	DIM A	DIM B	DIM C	DIM D
2	1.25	3.87	7.60	0.00
3	2.50	5.12	8.85	0.00
4	3.75	6.37	10.10	2.50
5	5.00	7.62	11.35	3.75
6	6.25	8.87	12.60	5.00
7	7.50	10.12	13.85	6.25
8	8.75	11.37	15.10	7.50
9	10.00	12.62	16.35	8.75
10	11.25	13.87	17.60	10.00
11	12.50	15.12	18.85	11.25
12	13.75	16.37	20.10	12.50
13	15.00	17.62	21.35	13.75
14	16.25	18.87	22.60	15.00
15	17.50	20.12	23.85	16.25
16	18.75	21.37	25.10	17.50
17	20.00	22.62	26.35	18.75
18	21.25	23.87	27.60	20.00
19	22.50	25.12	28.85	21.25
20	23.75	26.37	30.10	22.50

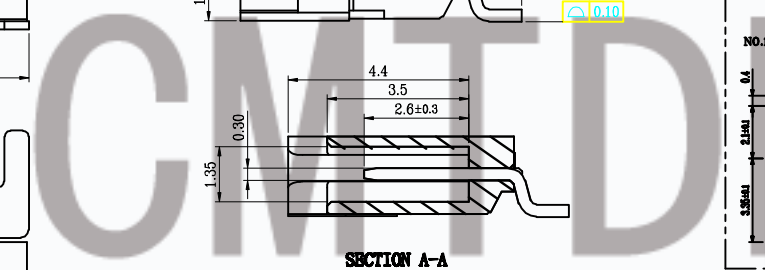

5				DRAWING: ERIC	GENERAL TOLERANCE X: ±0.25 X°: ±2° X: ±0.2 X°: ±1° .XX: ±0.15 .XX°: ±0.5° .XXX: ±0.1 .XXX°: ±0.5°		CMTDDZ 东莞市田都科技有限公司 Dongguan TianDu Technology Co. Ltd.
4				CHECKED:	UNIT: MM PROJECTION:	DESCRIPTION: 1.25超薄卧贴	
3	1. 绝缘胶	PA9T UL94V-0	米黄色	APPROVAL:	SCALE: 1/1		PART NO: T19-125185T-4-**-**
2	2. 磷青铜	磷青铜	铜合金/表面镀金 表面镀锡	APPROVAL:	SHEET: 1/1		REV: 1.0
1	3. 磷青铜	磷青铜	铜合金/表面镀金 表面镀锡	APPROVAL:			SIZE: A4
NO.	品名	物料号	镀层/色				