


REV.	ECN NO	LOCATIONS	DESCRIPTION	DATE

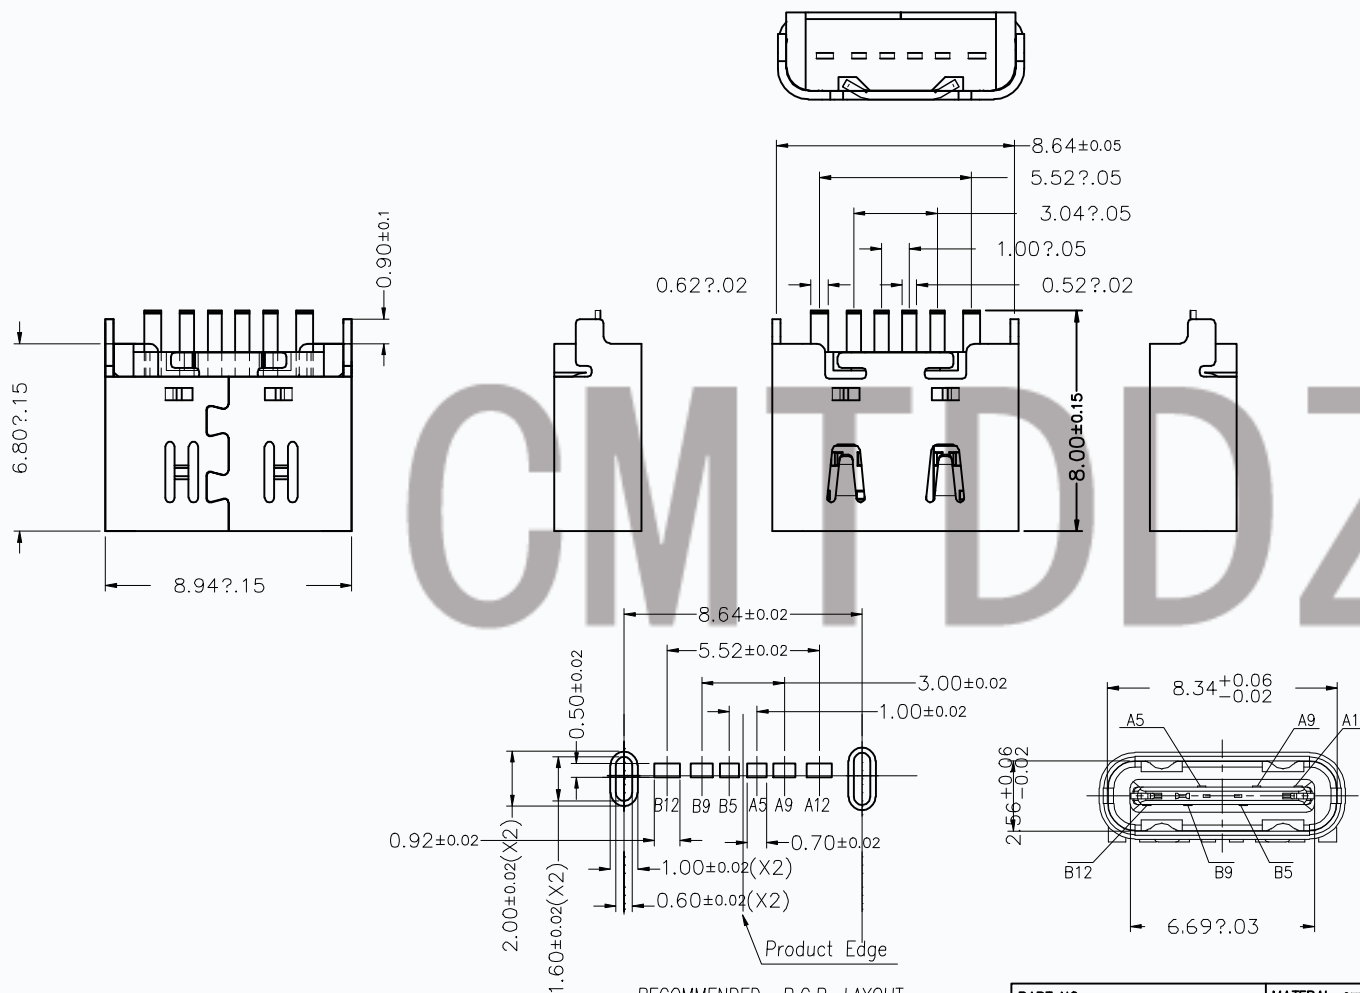

Specification:

1.Electrical Characteristics:

Contact Current Rating: 3 Amperes Max.
Rated Voltage: 30V Max.
Dielectric Withstanding Voltage: AC 100V r.m.s.
Insulation Resistance: 100 MΩ Minimum.
Contact Resistance: 40 mΩ Maximum.

2.Environmental:

Operating Temperature: $-40^{\circ}\text{C} \sim +85^{\circ}\text{C}$.

3.Mechanical Characteristics:

Insertion Force: $5 \sim 20\text{Nf}$.
Withdrawal Force: $6 \sim 20\text{Nf}$.
Durability Cycles: 5000 Cycles.

4. $\otimes$ Make is FAI test Dimension
▼ Make is major test Dimension

A5	CC1	B5	CC2
A9	VBUS	B9	VBUS
A12	GND	B12	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

PART NO:		MATERIAL: SEE NOTE		CMTDDZ 东莞市田都科技有限公司 Dongguan TianDu Technology Co. Ltd.	
MODEL NO:		FINSH: SEE NOTE			
UNIT: MM	SIZE: A4	COLOR: SEE NOTE		TITLE: TYPE-C 6PIN立插6.8款带弹	
TOLERANCE UNSPECIFIED .x ±0.15 .xx ±0.10 .xxx ±0.05 Ang. ±1°		DR:		DWG NO: T11-06LC02A-6.8H	
		CHK:		REV: A	
		APP:		SCALE: 1:1	
				DATE: 2021.02.25	