


SCHMATIC

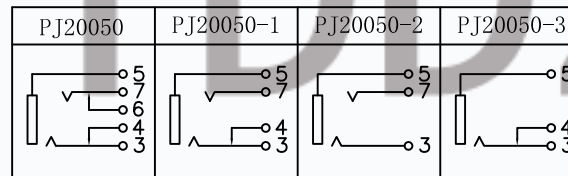

SPECIFICATION
 1. Rating : DC 30V 0.5A;
 2. Contact resistance: ≤50mΩ;
 3. Insulation resistance: ≥100MΩ (DC250V);
 4. Withstand voltage: 500VAC ;
 5. Insertion and extraction force: 3-25N;
 6. Life test: 5,000 cycles.

7	SPRING PIECE	1	MG STEEL	Ag(Au)-Platin
6	CURVE PIECE	1	H59 BRASS	Ag(Au)-Platin
5	CONTACT	1	PHOSPHOR BRONZE	Ag(Au)-Platin
4	CURTE PIECE	1	H59 BRASS	Ag(Au)-Platin
3	SPRING PIECE	1	MG STEEL	Ag(Au)-Platin
2	COVER	1	PA46	
1	HOUSING	1	PA46	
NO.	DESCRIPTION	QTY	MATERIAL	PLATING
UNIT: MM		TYPE:		MODEL NO:
		PHONE JACK		T13-2505-01
DESIGNER		PAPER NO:		PAGE 1 OF 1
CHECK		TOLERANCENGLS		SCALE
APPROVED		±0.3 ±2'		1:1 1
CMTDDZ 东莞市田都科技有限公司 Dongguan TianDu Technology Co. Ltd.				