
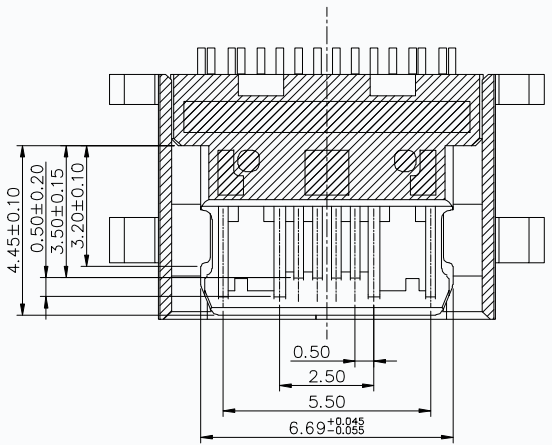




REV.	DESCRIPTION	NAME	DATE
A	NEWS ISSUE	ERIC	2021/09/23

NOTE:



- MATERIAL SPECIFICATION:
 - HOUSING: HIGH TEMPERATURE RESISTANT PLASTIC, UL94 V-0.
 - CONTACTS: COPPER ALLOY
 - MID PLATE: STAINLESS STEEL
 - SHELL: STAINLESS STEEL
- PLATING SPECIFICATION:
 - CONTACTS:
 - Ni 50u" MIN. UNDER PLATED OVER ALL.
 - Au PLATED ON THE FUNCTIONAL AREA OF CONTACT.
 - (GOLD PLATING THICKNESS FOLLOW THE P/N)
 - GOLD FLASH PLATING ON SOLDER AREA
 - SHELL:
 - Ni 30u" MIN. UNDER PLATED OVER ALL.
- MECHANICAL PERFORMANCE,
 - INSERTION FORCE: 0.5~2.0kgf.
 - REMOVAL FORCE: 0.8kgf~2.0kgf.
 - DURABILITY: 10000 CYCLES.
- ELECTRICAL PERFORMANCE,
 - CURRENT RATING: 5A
VOLTAGE RATING: 20V
 - INSULATION RESISTANCE: 100MΩ MIN
 - DIELECTRIC WITHSTAND VOLTAGE, AC 100V FOR 1 MINUTE.
 - LOW CONTACT RESISTANCE: INITIAL 40MΩ
AFTER 50MΩ
- ENVIRONMENTAL PERFORMANCE:
 - OPERATING TEMPERATURE: -30°C~+80°C.
- IR REFLOW:
 - THE PEAK TEMPERATURE ON THE BOARD SHALL BE MAINTAINED FOR 10 SECONDS AT 260°C.

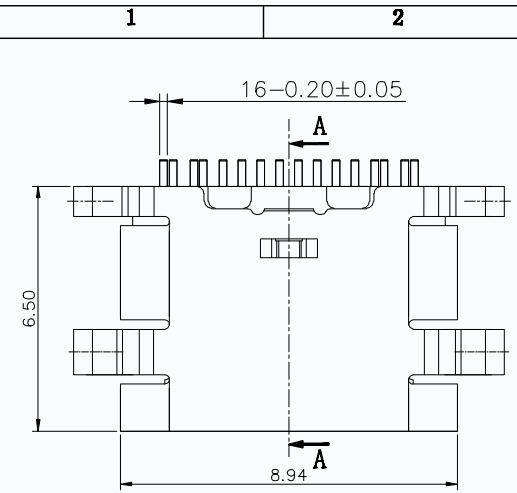

SECTION B-B
SCALE 1:1

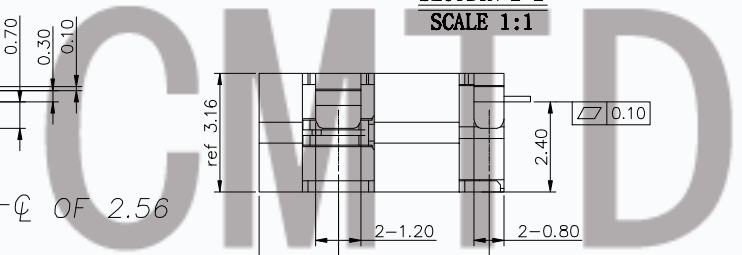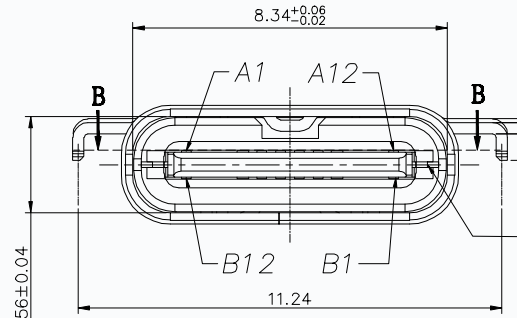

SECTION A-A
SCALE 1:1

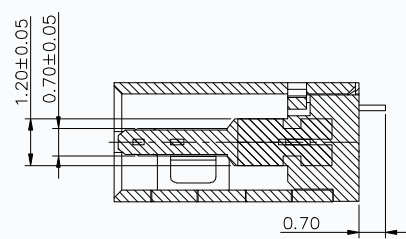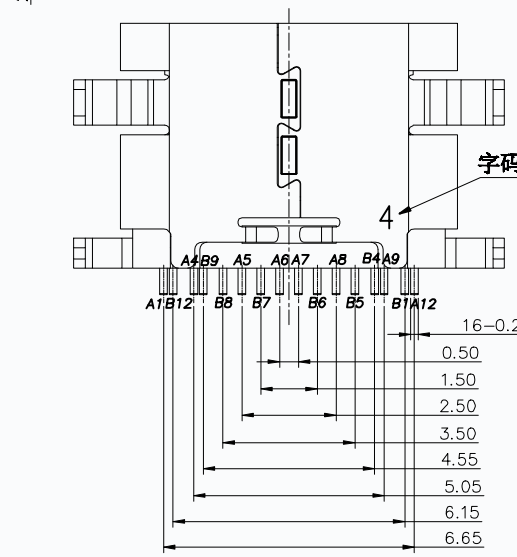

TOLERANCE UNSPECIFIED

.0	±0.35
.00	±0.25
.000	±0.15
X °	±2.00°

ASSEMBLY DRAWING

CMTDDZ 东莞市田都科技有限公司
Dongguan TianDu Technology Co. Ltd.

TITLE: USB TYPE C 16PIN, L-6.50mm
沉板2.40mm



DRAWN DATE	ERIC 2021/09/23	SIZE: A4	UNIT: mm.	PART. NO:	T11-16CB06-2.4H-3-6.5L
CHECKED DATE	JEFF 2021/09/23	SCALE:	1:1	PROJECTION	REV.: A
APPROVED DATE	JEFF 2021/09/23	DWG	PATH		PATH 1/3

REV.	DESCRIPTION	NAME	DATE
A	NEWS ISSUE	ERIC	2021/09/23

7.P/N: T11-16CB06-X-00XR
16:16 PIN

B:Black
N:NATURE

- 1: GOLD FLASH PLATING ON CONTACT AREA, GOLD FLASH PLATING ON SOLDER AREA
- 3: 3u" PLATING ON CONTACT AREA, GOLD FLASH PLATING ON SOLDER AREA
- 5: 5u" PLATING ON CONTACT AREA, GOLD FLASH PLATING ON SOLDER AREA

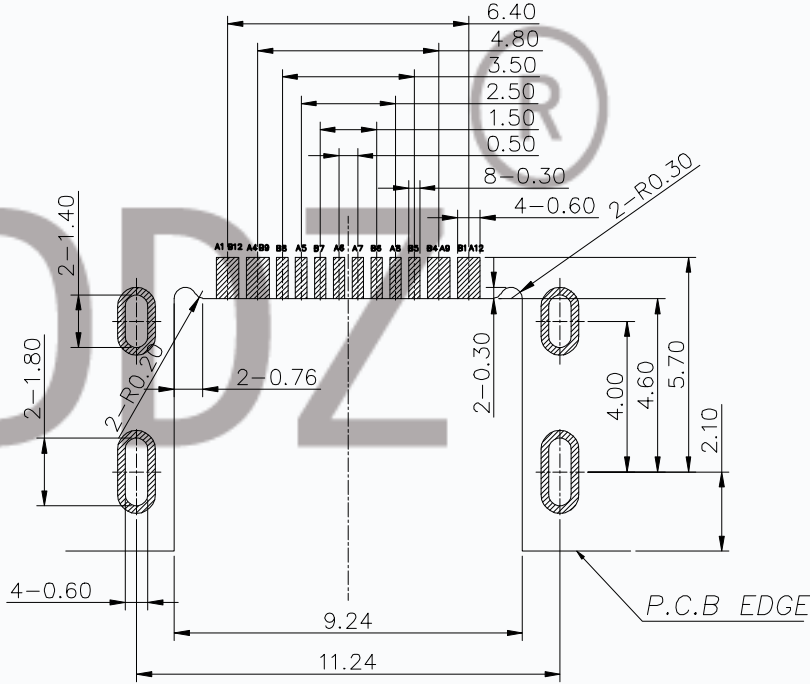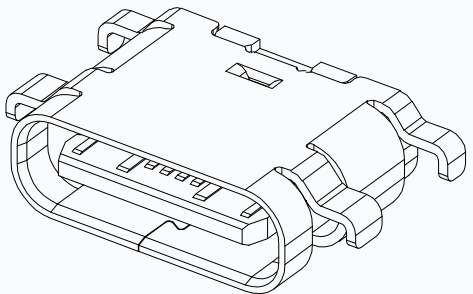



USB TYPE-C PIN ASSIGNMENTS

PIN NUMBER	SIGNAL NAME	PIN NUMBER	SIGNAL NAME
A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	Dp1	B7	Dn2
A7	Dn1	B6	Dp2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND

RECOMMEND P.C.B LAYOUT(COMPONENT SIDE)
TOLERANCE FOR PCB LAYOUT IS ± 0.05


<p>TOLERANCE UNSPECIFIED</p> <p>.0 ±0.35 .00 ±0.25 .000 ±0.15 X ° ±2.00°</p> <p>ASSEMBLY DRAWING</p>		<p>CMTDDZ 东莞市田都科技有限公司 Dongguan TianDu Technology Co. Ltd.</p>	
<p>TITLE: USB TYPE C 16PIN, L-6.50mm 沉板2.40mm—客户图</p>		<p>SIZE: A4 UNIT: mm. PART. NO: T11-16CB06-2.4H-3-6.5L</p>	
<p>DRAWN DATE: ERIC 2021/09/23</p>	<p>CHECKED DATE: ERIC 2021/09/23</p>	<p>SCALE: 1:1</p>	<p>PROJECTION REV.: A</p>
<p>APPROVED DATE: JEFF 2021/09/23</p>	<p>DWG PATH</p>	<p>T11-16CB06-2.4H-3-6.5L</p>	<p>PATH 2/3</p>

REV.	DESCRIPTION	NAME	DATE
A	NEWS ISSUE	ERIC	2021/09/23

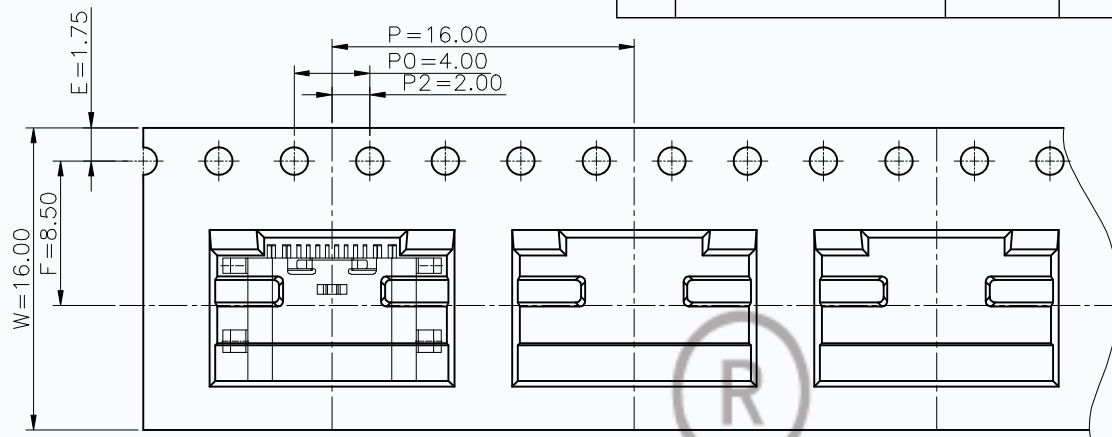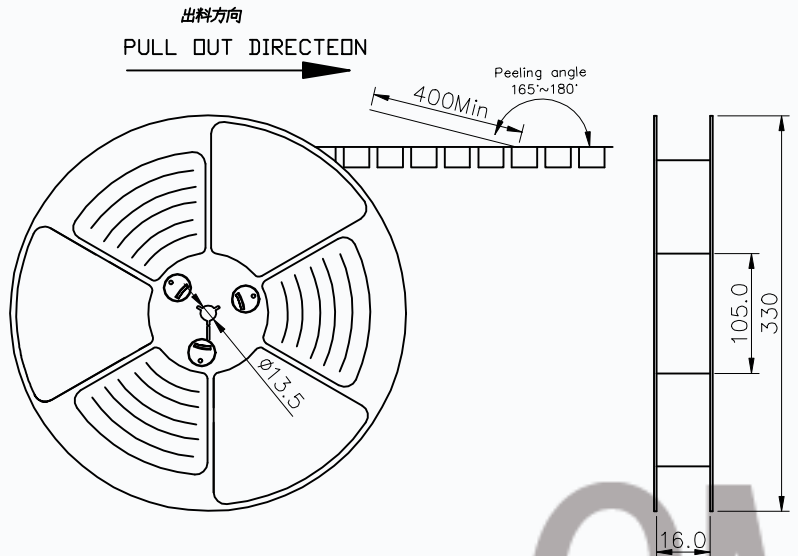


NOTES

1. 帶子引導長度
LEAD TAPE LENGTH
出料方向
PULL OUT DIRECTEON

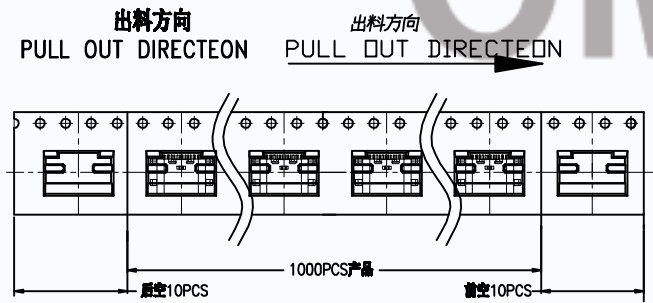

2. 上帶 剝力力為: 0.1~1.3N(10.2gf~130gf)
PEELING OFF FORCE OF TOP TAPE:0.1~1.3N(10.2gf~130gf)
出貨運輸過程中一定注意:
THIS REQUIREMENT SHOULD BE APPLIED AT SHIPMENT;
卷帶在運輸過程中不能散開
PEELING OFF SHOULD NOT BE ALLOWED DURING TRANSPORTATION

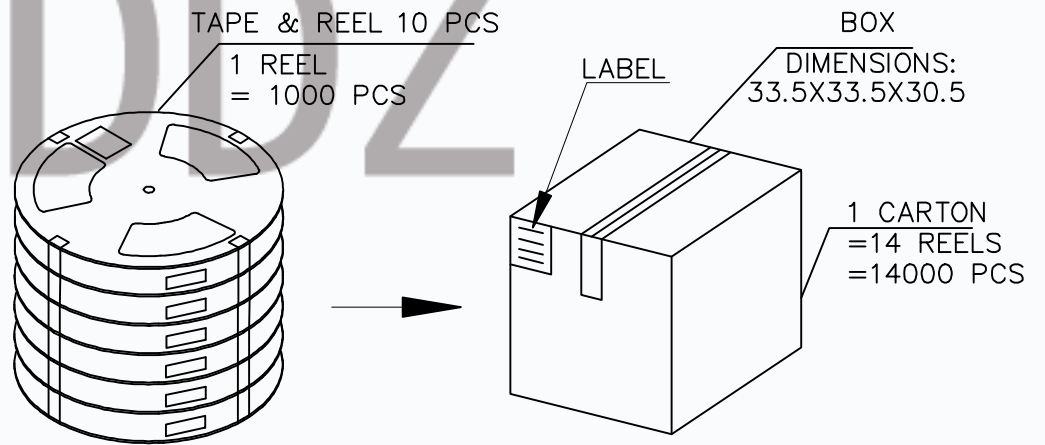

TOLERANCE UNSPECIFIED

.0	±0.35
.00	±0.25
.000	±0.15
∠ °	±2.00°

ASSEMBLY DRAWING

CMTDDZ 东莞市田都科技有限公司
Dongguan TianDu Technology Co. Ltd.

TITLE: USB TYPE C 16PIN, L-6.50mm
沉板2.40mm—客户图

DRAWN DATE	ERIC	2021/09/23	SIZE:A4	UNIT:mm.	PART.NO:	T11-16CB06-2.4H-3-6.5L
CHECKED DATE	ERIC	2021/09/23	SCALE:	1:1	PROJECTION	REV.: A
APPROVED DATE	JEFF	2021/06/05	DWG PATH	T11-16CB06-2.4H-3-6.5L		PATH 3/3

包裝明細表 (The detail of the packing) Carton

產品料號 (Product No.)	包裝容量 (Packing Capacity)			重量 Weight (Kg)		
	pcs/box	boxs/Carton	Pcs/Box	N.W./Pcs	N.W./Box	G.W./Box
T11-16CB06-2.4H-3-6.5L	1000	14	14000	—	—	—