


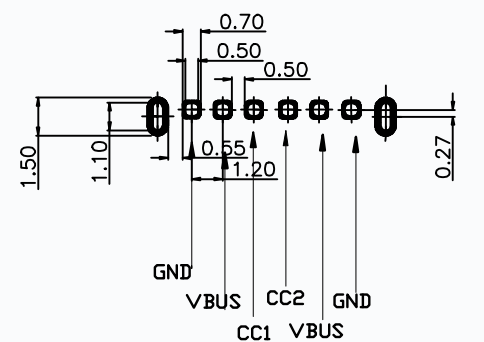

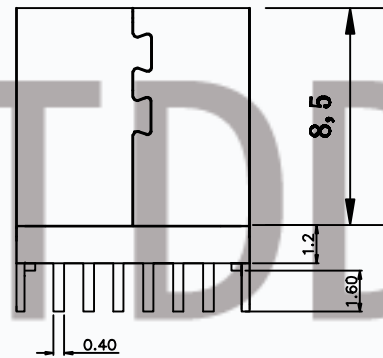


REV.	MODIFICATION	REV. No.	NAME	DATE
A0	△新版发行			2019-04-24

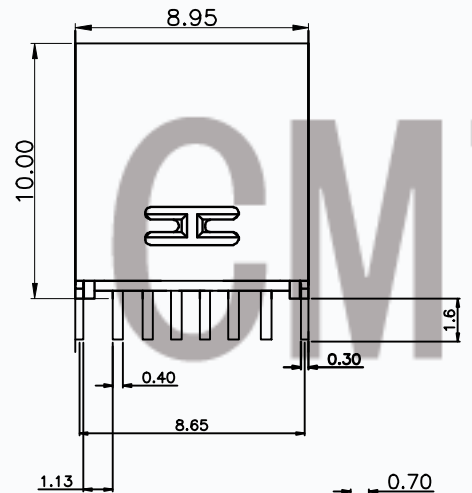

B12	GND
B9	VBUS
B5	CC2
A5	CC1
A9	VBUS
A12	GND
PIN	SIGNAL NAME

- NOTES:
- 1.MATERIAL:
MOLDING: LCP UL94 V-0
CONTACT:COPPER ALLOY.
GOLD PLATED Min ON CONTACT AREA,100u"
Min TIN (LEAD FREE) ON SOLDER AREA,
SHELL: COPPER ALLOY C2680,T=0.30±0.03mm
50u" NICKEL PLATING OVER ALL.
 - 2.MECHANICAL:
INSERTION: 5~20N.
EXTRACTION: 8~20N AFTER TEST.
DURABILITY: 10000 CYCLES
 - 3.ELECTRICAL:
CURRENT: 3A FOR VBUS;
1.25A FOR GND PIN.
0.25A FOR OTHER.
VOLTAGE: 20 V MAX
WITHSTANDING VOLTAGE: 100V AC R.M.S.
CONTACT RESISTANCE: 40mΩ MAX.
INSULATION RESISTANCE: 100MΩ MIN.
 - 4.ENVIRONMENTAL
TEMPERATURE RANGE -25°C ~ +85°C
 5. 尺寸标注事项:
图示有标◎者为首样全检,重点管控尺寸.
 6. 产品符合RoHS标准

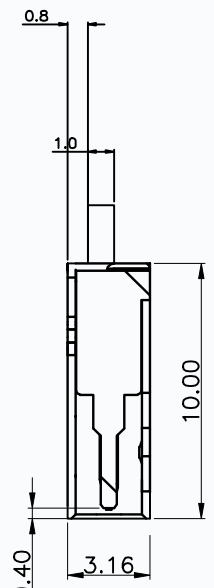

RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED ±0.05mm

CMTDDZ 东莞市田都科技有限公司
Dongguan TianDu Technology Co. Ltd.

.X: ±0.35	.X': ±1.5'	INTENDED USE: CONNECTOR	TITLE: USB TYPE C 6PIN PLUG 简易版立贴直插10.0	
.XX: ±0.25	.XX': ±1.0'		PART NO.:	
.XXX: ±0.20	.XXX': ±0.5'	APPD.:	DWG. NO.:	T11-06LC02-10.0H
MAT'L: SEE NOTES		CHEK.:	SCALE: 1:1	PAGE: 1/1
FINISH:		DR.:	UNIT: mm	REV.: A0