



REV.	MODIFICATION	REV. No.	NAME	DATE
AO	新版发行		ERIC	2019-04-24



B12	GND
B9	VBUS
B5	CC2
A5	CC1
A9	VBUS
A12	GND
PIN	SIGNAL NAME

NOTES:

- 1.MATERIAL:  
MOLDING: LCP UL94 V-0  
CONTACT: COPPER ALLOY.  
GOLD PLATED Min ON CONTACT AREA, 100u"  
Min TIN (LEAD FREE) ON SOLDER AREA,  
SHELL: Stainless Steel 201, T=0.30±0.03mm  
50u" NICKEL PLATING OVER ALL.
- 2.MECHANICAL:  
INSERTION: 5~20N.  
EXTRACTION: 8~20N AFTER TEST.  
DURABILITY: 5000 CYCLES
- 3.ELECTRICAL:  
CURRENT: 3A FOR VBUS;  
1.25A FOR GND PIN.  
0.25A FOR OTHER.  
VOLTAGE: 20 V MAX  
WITHSTANDING VOLTAGE: 100V AC R.M.S.  
CONTACT RESISTANCE: 40mΩ MAX.  
INSULATION RESISTANCE: 100MΩ MIN.
- 4.ENVIRONMENTAL  
TEMPERATURE RANGE -25°C ~ +85°C
5. 尺寸标注事项:  
图示有标注者为首样全检, 重点管控尺寸.
6. 产品符合RoHS标准.

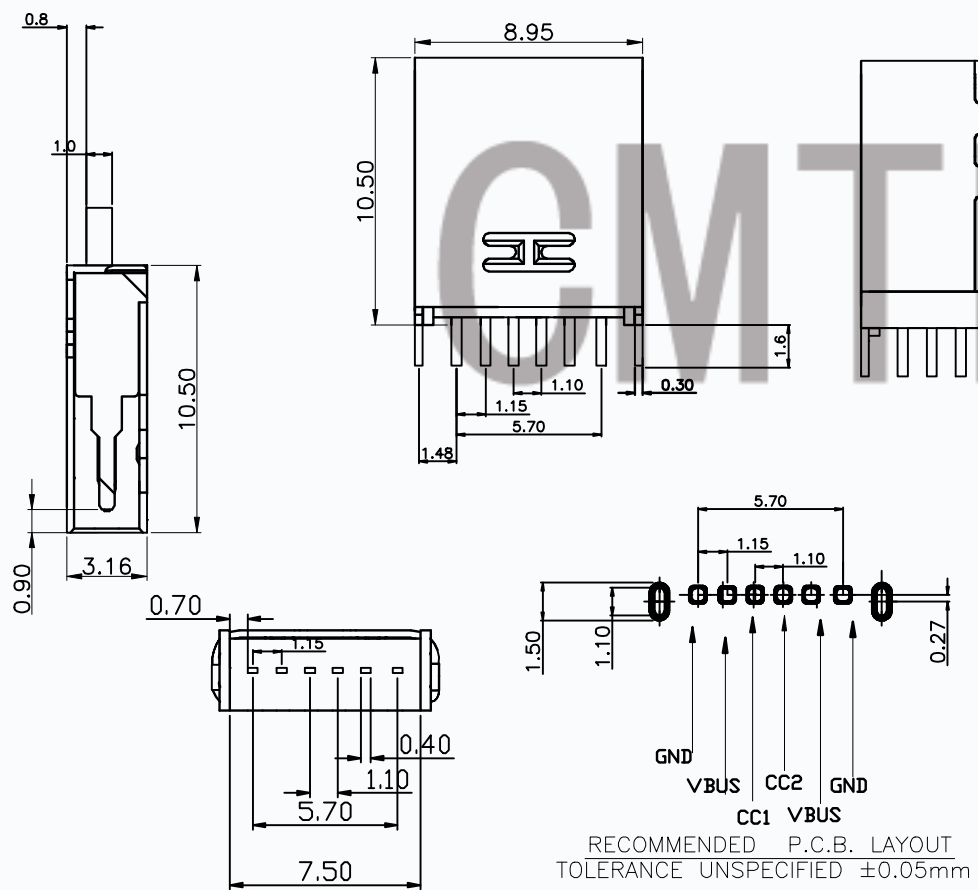

RECOMMENDED P.C.B. LAYOUT  
TOLERANCE UNSPECIFIED ±0.05mm

# CMTDDZ 东莞市田都科技有限公司

## Dongguan TianDu Technology Co. Ltd.

.X: ±0.35	.X': ±1.5'	INTENDED USE: CONNECTOR	TITLE: USB TYPE C 6PIN PLUG 筒身版立贴直插10.5		
.XX: ±0.25	.XX': ±1.0'		PART NO.:	SEE TABLE	
.XXX: ±0.20	.XXX': ±0.5'	APPD.:	DWG. NO.:	T11-06LC02-10.5H	
MAT'L: SEE NOTES		CERD.:	SCALE:	1:1	
FINISH:		DR.:	ERIC	PAGE:	
				UNIT:	mm
				REV.:	AO