
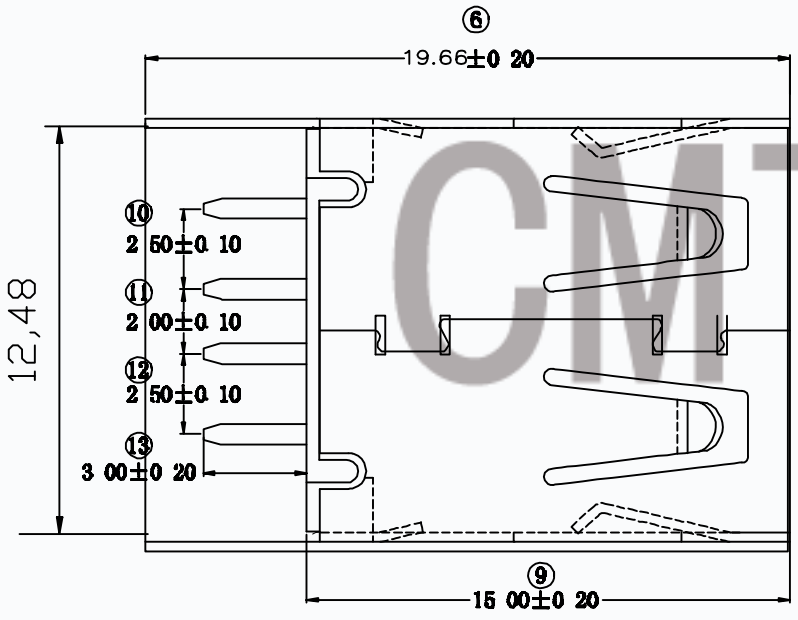
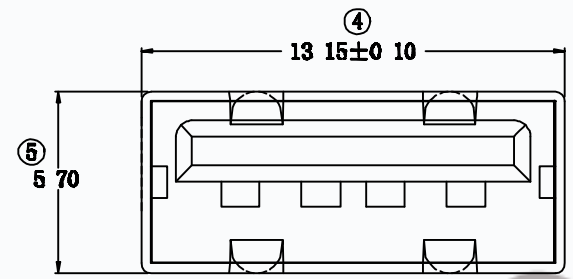


REV.	DESCRIPTION	DATE
A		2013.8.15

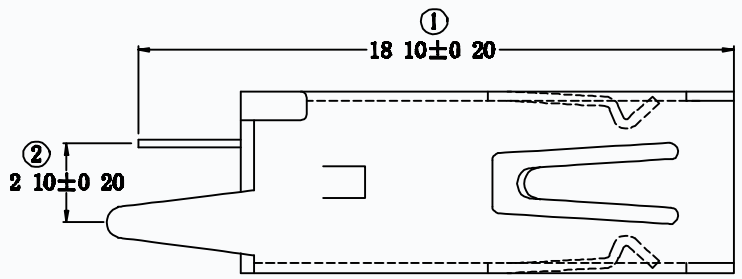

特性: Specifications:

电气: Electrical:

接触阻抗: Contact Resistance
30 milliohms MAX

耐电压: Dielectric Withstanding Voltage:
500 V AC AT Sea Level


绝缘阻抗: Insulation Resistance:
1000 MEGA ohms MIN

材料: Material

- 1. **塑料:** PBT UL 94V-0 BLACK
- 2. **端子:** Contact Copper Alloy C2680H
- 3. **铜壳/铁壳:** Shell: Copper Alloy

电镀: Finish

- 1. **端子: Contact:** Plated Gold in Mating (1U) Area
Tin On Solder Tails
接触点镀金 1U". 脚镀锡
- 2. **铜壳/铁壳: Shell**
Nickel plating 镀镍

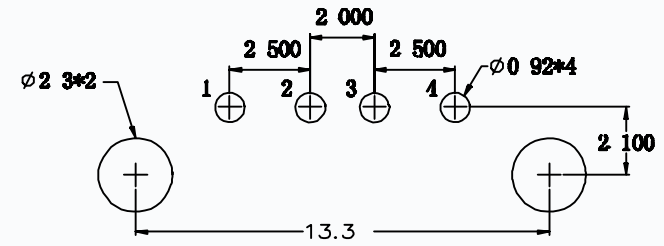

UNLESS TOLERANCE		DRAW BY	ERIC	
GENERAL	ANGLE	DESIGN BY		
X. ± 0.38	X.' ± 3.0'	CHECK BY		
.X ± 0.30	.X' ± 2.0'	APPROVE BY		
.XX ± 0.25	.XX' ± 1.0'	SCALE	SHEET	UNIT
.XXX ± 0.10	.XXX' ± 0.5'	1:1	1/1	MM

CMTDDZ 东莞市田都科技有限公司
Dongguan TianDu Technology Co., Ltd.

ITEM :
USB 4P AF 直插 15.0 无卷边直脚

DRW NO: T10-2F150-03-01 REV: A0