

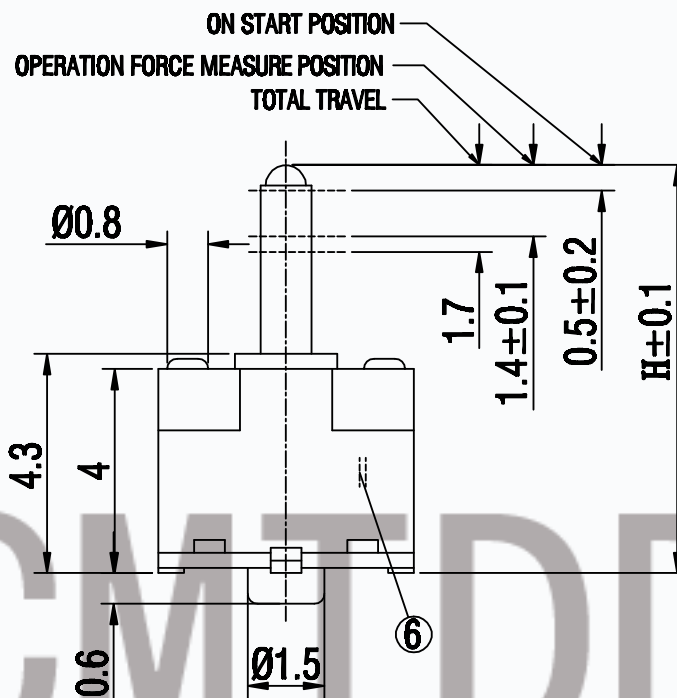




CAD FILE:

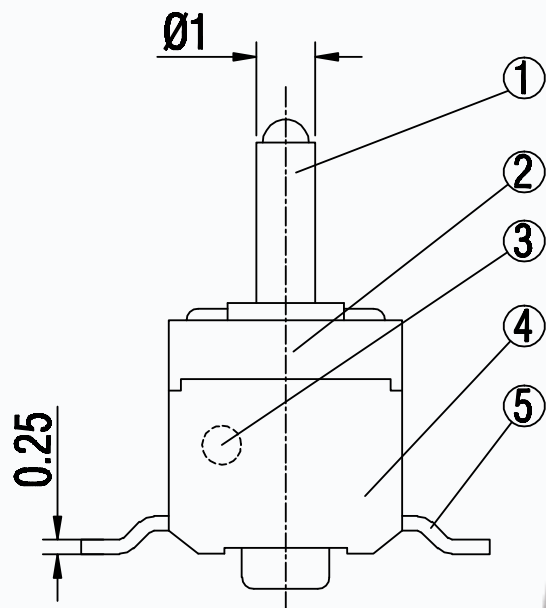

MODEL NO.	KNOB(H)
T8-405040-H	(6.5~15)mm

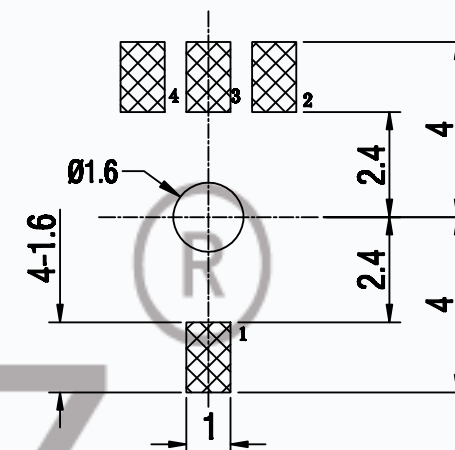

P.C.B. LAYOUT

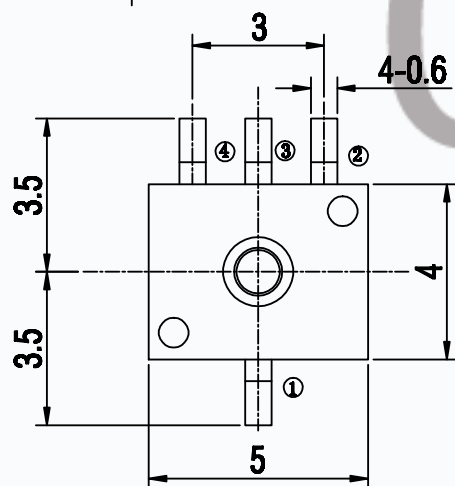

CIRCUIT DIAGRAM

SPECIFICATIONS

Rating	1A 16V DC
Insulation Resistance	50M Ω min
Contact Resistance	200m Ω max
Operating Force	50gf $\pm$ 10gf
Operating Life	20,000 cycles

8					TOLERANCE UNLESS SPECIFIED WITHIN 1.5mm :±0.1mm OVER 1.5mm : ±0.2mm	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF DONGGUAN TIANDU ELECTRONICS CO.,LTD. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF DONGGUAN TIANDU ELECTRONICS CO., LTD					
7											
6	CONTACT SPRING	PHOSPHOR BRONZE	1	Ag PLATED							
5	TERMINAL	PHOSPHOR BRONZE	4	Ag PLATED			DESCRIPTIONS OF REVISION		APPD.		
4	CASE	PPA	1	BLACK	TITLE : DETECTOR SWITCH		UNIT : mm		DRWG NO.:		
3	SPRING	SUS	1	Ag PLATED	MODEL: T8-A-HM01-H-01		SCALE: 3:1		DWN.	ERIC	2013-6-17
2	COVER	PPA	1	BLACK	CMTDDZ 东莞市田都电子有限公司 DONGGUAN TIANDU ELECTRONICS CO.,LTD.				CHK'D	MAIKO	2013-6-17
1	KNOB	PPA	1	BLACK					APPD.	Coco	2013-6-17
NO.	PARTS	MATERIALS	Q'TY	FINISH							