





CAD FILE:

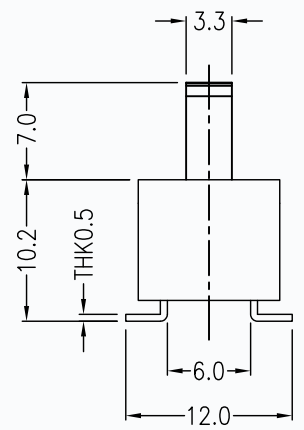



MODEL NO.	KNOB(G/VG)
T4-224523S-G	(2~11)mm

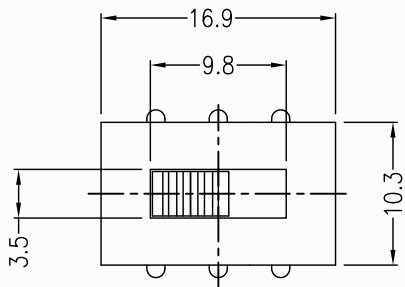

SCHEMATIC(NON-SHORTING)

RECOMMENDED
P.C.BOARD LAYOUT

CMTDDZ

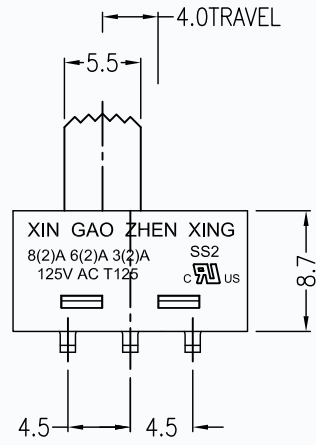

SPECIFICATIONS	
Rating	UL CUL: 6(2)A 3(2)A 125VAC TUV: 6(2)A 3(2)A 250V/125VAC CQC: 6(2)A 3(2)A 250V/125VAC
CIRCUIT	2P2T
Timing	SHORTING
Travel	4.0mm
Contact Resistance	100 mΩ MAX
Operating Force	500gf ± 200gf
Operating Life	10,000 cycles

NO.	PARTS	MATERIALS	Q'TY	FINISH
8	SPRING COIL	STEEL WIRE	1	NATURAL
7	SPRING BALL	STELL	1	NATURAL
6	SPRING COIL	STEEL WIRE	4	NATURAL
5	CONTACT BRIDGE	COPPER ALLOY	2	Ag PLATED
4	TERMINAL	COPPER ALLOY	6	Ag PLATED
3	BASE	HTPA	1	WHITE
2	PLASTIC COVER	HTPA	1	WHITE
1	KNOB	HTPA	1	WHITE

TOLERANCE UNLESS SPECIFIED WITHIN 1.5mm : ±0.1mm OVER 1.5mm : ±0.2mm	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF DONGGUAN TIANDU TECHNOLOGY CO.,LTD. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF DONGGUAN TIANDU TECHNOLOGY CO., LTD		DESCRIPTIONS OF REVISION		APPD.
	TITLE : AC VERTICAL SLIDE SWITCH	UNIT : mm	DRWG NO.: CMTDDZ-T4-224523S-G		
MODEL: T4-224523S-G	SCALE: 3:1	DWN.	ERIC	2013-6-17	
CMTDDZ 东莞市田都科技有限公司 Dongguan TianDu Technology Co. Ltd.		CHK'D	MAIKO	2013-6-17	
		APPD.	Coco	2013-6-17	