

MAPX	MODIFICATION	DATE

NOTES:

1.MATERIAL:

MOLDING: LCP UL94 V-0
CONTACT: COPPER ALLOY.
GOLD PLATED Min ON CONTACT AREA, 100u"
Min TIN (LEAD FREE) ON SOLDER AREA,
SHELL: SUS
50u" NICKEL PLATING OVER ALL.

2.MECHANICAL:

INSERTION: 5~20N.
EXTRACTION: 8~20N AFTER TEST.

3.ELECTRICAL:


CURRENT: 3A FOR VBUS;
1.25A FOR GND PIN.
0.25A FOR OTHER.
VOLTAGE: 20 V MAX
WITHSTANDING VOLTAGE: 100V AC R.M.S.
CONTACT RESISTANCE: 40mΩ MAX.
INSULATION RESISTANCE: 100MΩ MIN.

4.ENVIRONMENTAL

TEMPERATURE RANGE -25°C ~ +85°C

5. 产品符合RoHS标准

B12	GND
B9	VBUS
B5	CC2
A5	CC1
A9	VBUS
A12	GND
PIN	SIGNAL NAME

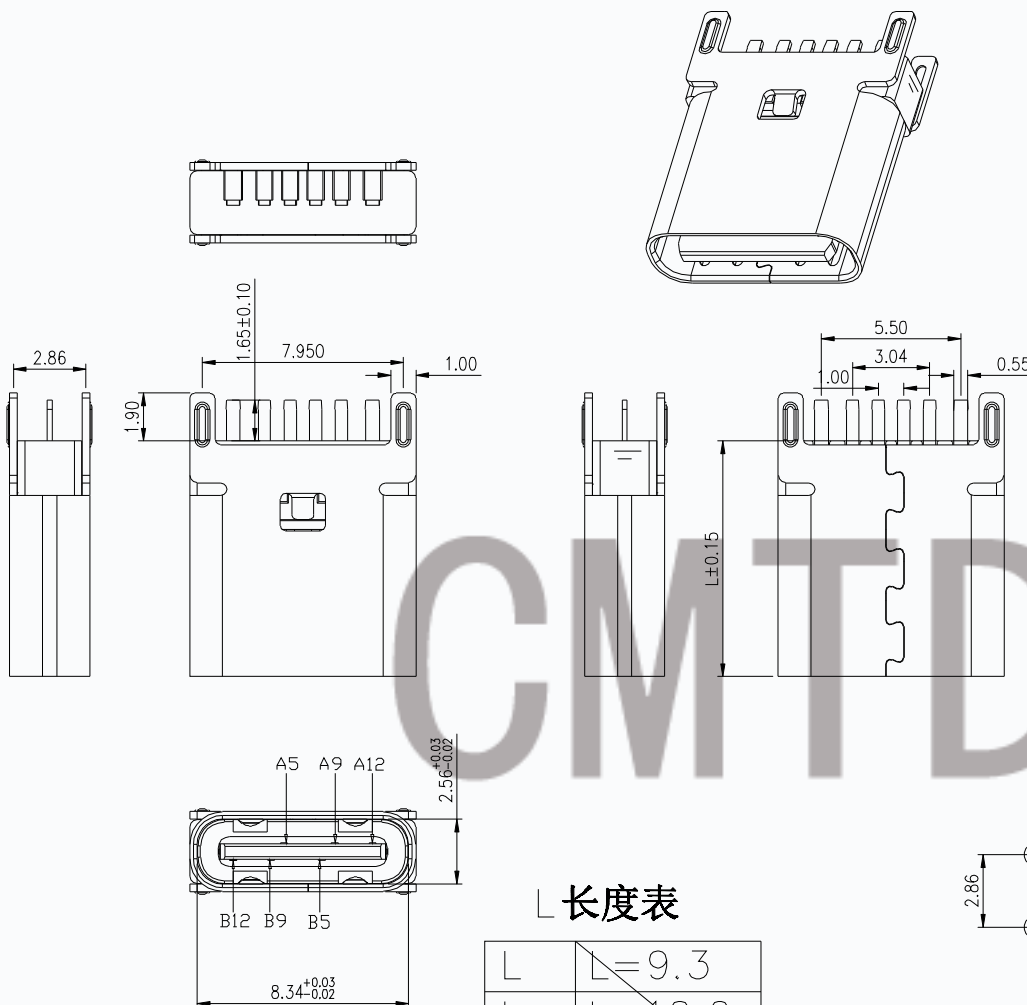

L 长度表

L	L=9.3
L	L=10.0
L	L=10.50
L	L=13.0
L	L=13.70
L	L=15.0
L	L=17.50

RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED ±0.05mm

产品图

PRODUCT CHART DWG

公差一览表

TOLERANCE UNLESS OTHERWISE

X.	±0.30	X.	±5.°
.X	±0.25	.X	±2.°
.XX	±0.15	.XX	±1.°
.XXX	±0.10	.XXX	±0.5°

CMTDDZ 东莞市田都科技有限公司
Dongguan TianDu Technology Co. Ltd.

单位 UNITS	MM	制图 DRAWING	ERIC	制图料号 PRODUCT PART NO.	T11-06LC05-H-02
比例 SCALE	1:1	审核 CHKD		产品名称 PRODUCT NO.	USB TYPE C 6P 立插4脚
日期 DATE	2019.11.23	核准 APPD		角法 VIEW	版本 VER
					A0