

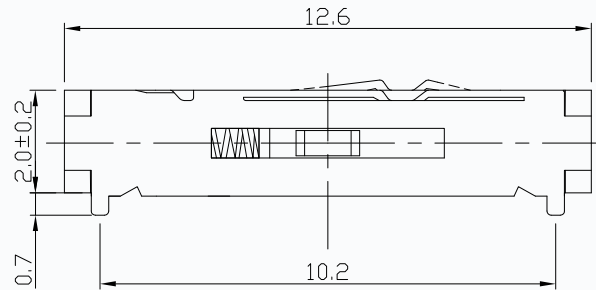
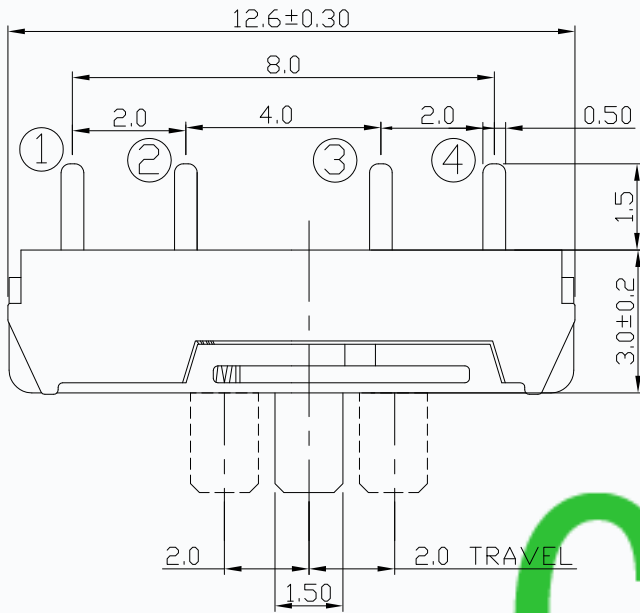


CAD FILE:


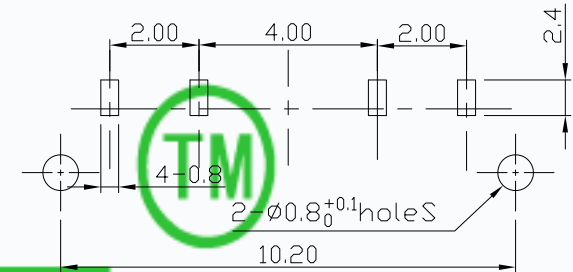


| | |
|------------|---------|
| MODEL NO. | KNOB(G) |
| T1-1386L-G | 2mm |



P.C.B LAYOUT
TOP VIEW

CMTDDZ

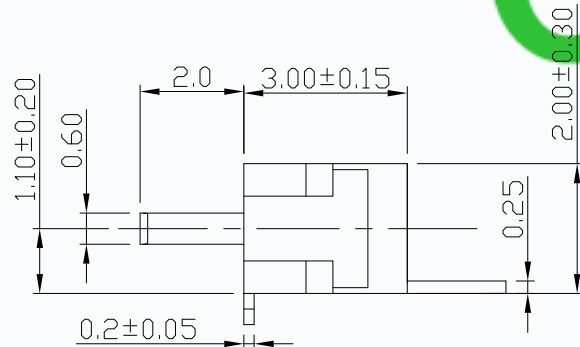

CIRCUIT DIAGRAM

SPECIFICATIONS

| | |
|---------------------------------|----------------|
| Rating | 0.3A 6V DC |
| Insulation Resistance | > 100 MΩ |
| Dielectric Withstanding Voltage | 500V 0.5mA/min |
| Contact Resistance | < 70 mΩ |
| Operating Force | 200gf ± 100gf |
| Operating Life | 10,000 cycles |

| | | | | | | | | | | |
|-----|----------|-----------------|------|-----------|--|-------|-----------|--------------------------|-----------------------------|-----------|
| 8 | | | | | TOLERANCE | | | | | |
| 7 | | | | | UNLESS SPECIFIED | | | | | |
| 6 | CLIP | BECU | 1 | Ag PLATED | WITHIN 1.5mm : ±0.1mm | A | 2014-8-29 | TIANDU ELECTRONICS | | |
| 5 | SPRING | SUS | 1 | NATURE | OVER 1.5mm : ±0.2mm | ISSUE | DATE | DESCRIPTIONS OF REVISION | APPD. | |
| 4 | TERMINAL | PHOSPHOR BRONZE | 4 | Ag PLATED | TITLE : MINI SLIDE SWITCH | | | UNIT : mm | DRWG NO.:CMTDDZ-T1-1386L-00 | |
| 3 | CASE | LCP | 1 | BLACK | MODEL: T1-1386L-G | | | SCALE:3:1 | | |
| 2 | COVER | BRASS | 1 | Ag PLATED | CMTDDZ 东莞市田都电子有限公司 DONGGUAN TIANDU ELECTRONICS CO.,LTD. | | | DWN | ERIC | 2014-8-29 |
| 1 | SLIDER | PA46 | 1 | BLACK | | | | CHK'D | MAIKO | 2014-8-29 |
| NO. | PARTS | MATERIALS | Q'TY | FINISH | | | | APPD | Coco | 2014-8-29 |