

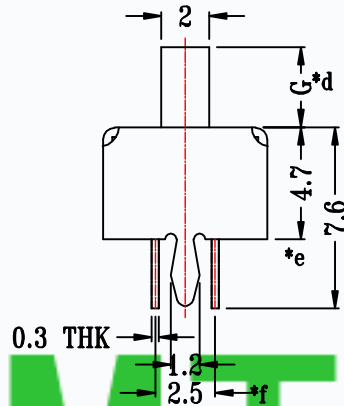



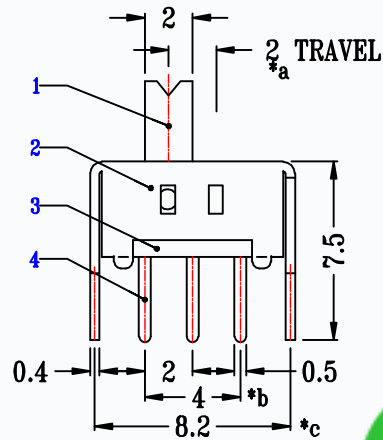


CAD FILE:

MODEL NO.	KNOB(G/VG)
T2-222003-G	(2~8)mm

P.C.B LAYOUT
BOTTOM VIEW

CMTDDZ



SCHEMATIC (SHORTING)

SPECIFICATIONS

Rating	0.3A 30V DC
CIRCUIT	2P2T
Timing	SHORTING
Travel	2.0mm
Contact Resistance	< 100 mΩ
Operating Force	250gf ± 100gf
Operating Life	10,000 cycles

8					TOLERANCE UNLESS SPECIFIED WITHIN 1.5mm : ±0.1mm OVER 1.5mm : ±0.2mm	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF DONGGUAN TIANDU ELECTRONICS CO.,LTD. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF DONGGUAN TIANDU ELECTRONICS CO., LTD	DESCRIPTIONS OF REVISION		APPD.
7									
6	SPRING PLATE	SUS	1	NATURAL	TITLE : VERTICAL SLIDE SWITCH UNIT : mm DRWG NO.: CMTDDZ-T2-222003-00	SCALE: 3:1	DWN.	ERIC	2013-6-17
5	CONTACT CLIP	PBS STRIP	1	Ag PLATED			CHK'D	MAIKO	2013-6-17
4	TERMINAL	BRASS STRIP	6	Ag PLATED			APPD.	Coco	2013-6-17
3	BASE	PHENOLIC RESIN	1	NATURAL					
2	KNOB	POM	1	BLACK					
1	FRAME	STEEL STRIP	1	NI PLATED					
NO.	PARTS	MATERIALS	Q'TY	FINISH	CMTDDZ 东莞市田都电子有限公司 DONGGUAN TIANDU ELECTRONICS CO.,LTD.				